

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

Attorney Docket No.: 102460

Date: March 12, 1999

BOX PATENT APPLICATION

**NONPROVISIONAL APPLICATION TRANSMITTAL
 RULE §1.53(b)**

Assistant Commissioner for Patents
 Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): COMMUNICATION TERMINAL APPARATUS AND METHOD

By (Inventors): Tokunori KATO and Susumu CHIDA

- ☒ Formal drawings (Figs. 1-12; 10 sheets) are attached.
- ☒ A Declaration and Power of Attorney is filed herewith.
- ☒ An assignment of the invention to BROTHER KOGYO KABUSHIKI KAISHA is filed herewith.
- ☐ An Information Disclosure Statement is filed herewith.
- ☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.
- ☐ A Preliminary Amendment is filed herewith.
- ☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____--
- ☒ Priority of foreign application Nos. 10-66550 filed March 17, 1998 in Japan and 10-74062 filed March 23, 1998 in Japan is claimed (35 U.S.C. §119).
- ☒ A certified copy of the above corresponding foreign applications is filed herewith.
- ☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF
 ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	20 - 20	= 0
INDEP CLAIMS	4 - 3	= 1
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

* If the difference is less than zero, enter "0".

SMALL ENTITY		OR	OTHER THAN A SMALL ENTITY	
RATE	FEE		RATE	FEE
	\$ 380	OR		\$ 760
x 9 =	\$	OR	x 18	\$ 0
x 39 =	\$	OR	x 78	\$ 78
+130 =	\$	OR	+260	\$ 0
TOTAL	\$	OR	TOTAL	\$ 838

- ☒ Check No. 66863 in the amount of \$838.00 to cover the filing fee is attached. Except as otherwise noted herein, the Commissioner is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
- ☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,

Stephen J. Walder
 James A. Oliff

Registration No. 27,075

Stephen J. Walder
 Registration No. 41,534

JAO:SJW/kmg

COMMUNICATION TERMINAL APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

1. Field of the invention

5 The present invention relates to a communication terminal apparatus that operates based on parameters and the like stored in a non-volatile storage device.

2. Description of the Related Art

Due to different communication standards, specifications and the like in different countries, the specifications of communication terminal apparatuses for export
10 need to be modified separately for their importing countries so that each communication terminal apparatus complies with the communication standards and the like of its importing country. Therefore, it is a normal practice in production of a communication terminal apparatus for export, to prepare a non-volatile memory dedicated to store parameters that are specifically for the importing country and then install the non-volatile
15 memories into communication terminal apparatuses.

Thus, in a communication terminal apparatuses each incorporating such a dedicated non-volatile memory mounted on a control circuit board, the parameters and the like regarding a country once stored in the dedicated non-volatile memory cannot be changed to those regarding another country. Therefore, if the number of apparatuses for
20 export to a given country is changed after a previously set number of apparatuses for the country have been produced, an excess inventory or a low inventory may immediately occur.

SUMMARY OF THE INVENTION

The present invention provides a communication terminal apparatus and
25 method wherein the parameters and the like related to a plurality of countries, areas and the like, are pre-stored in a non-volatile memory device, and the parameters and the like corresponding to one of the countries, areas and the like can easily be selected. The

invention also provides a communication terminal apparatus and method wherein a main program of the communication terminal apparatus is prevented from starting before the specification for a country is selected from pre-stored specifications for a plurality of countries and set. In this way, the main program is not started on the basis of a false
5 specification that is incorrectly set and, therefore, an error in setting the specification or a failure to set the specification can be prevented and the product quality can be improved.

According to one aspect of the invention, there is provided a communication terminal apparatus including a non-volatile memory device that stores parameters of various kinds, and a control device that performs an operation based on at least the
10 parameters. The non-volatile memory device includes a read-only non-volatile memory that stores parameters regarding a plurality of geographical divisions including countries and areas, and a rewritable non-volatile memory that is capable of storing at least the parameters. If a geographical division is selected, the control device initializes the rewritable non-volatile memory on the basis of at least parameters regarding the selected
15 geographical division, the parameters being read from the read-only non-volatile memory.

The term "non-volatile memory device" includes a memory device that retains data and the like stored therein even if a predetermined power supply discontinues. The "read-only non-volatile memory", included in the non-volatile memory device, includes
20 a non-volatile memory that prevents stored data and the like from being rewritten and that is dedicated for reading data or the like. The read-only non-volatile memory may be, for example, a ROM, diskette, IC card or the like. The "rewritable non-volatile memory", included in the non-volatile memory device, includes a non-volatile memory that allows stored data or the like to be rewritten. The rewritable non-volatile memory
25 may be, for example, an EEPROM, RAM, or the like.

When a certain geographical division, that is, a certain country, area or the like, is selected, the control device reads the parameters regarding the selected geographical

division from the read-only non-volatile memory storing the parameters regarding a plurality of geographical divisions, and then stores the read parameters into the rewritable non-volatile memory. Thus, the control device initializes the rewritable non-volatile memory on the basis of the parameters read from the read-only non-volatile memory. Therefore, the communication terminal apparatus of the invention makes it possible to change the parameters and the like regarding a country, area or the like even after the production of the communication terminal apparatus. Furthermore, since the rewritable non-volatile memory is initialized on the basis of the parameters read from the read-only non-volatile memory, the possibility of an input error or the like made by an inspector or the like is considerably reduced, and necessary parameters and the like can be easily and reliably selected and stored.

The above-described initialization of the rewritable non-volatile memory includes an operation of reading parameters regarding a selected geographical division from the read-only non-volatile memory and storing the parameters into the rewritable non-volatile memory, and may also include other operations or other manners of operations. The term "geographical divisions" includes countries or nations having substantially defined territories, and administrative districts or areas within countries, and may further include a region extending over a plurality of countries, and the like.

In the communication terminal apparatus, the parameters regarding the geographical divisions may include geographical division-specific parameters specific to the geographical division and non-geographical division-specific parameters other than the geographical division-specific parameters. If no geographical division-specific parameter has been stored in the rewritable non-volatile memory, the control device reads at least one geographical division-specific parameter regarding the selected geographical division and at least one non-geographical division-specific parameter regarding the selected geographical division from the read-only non-volatile memory, and stores the at least one geographical division-specific parameter and the at least one

non-geographical division-specific parameter into the rewritable non-volatile memory.

The term "geographical division-specific parameter" includes a parameter that needs to be set separately for each geographical division, including, for example, parameters regarding the communication standards, the communication conditions, and the functions of telephone exchanges employed in a country, area or the like, and, furthermore, parameters regarding data setting and the like in such a geographical division. The "non-geographical division-specific parameter" includes parameters that are set separately for a user of the communication terminal apparatus, including parameters regarding a user telephone number, a user facsimile number, a transmitter data indicating a transmitter facsimile apparatus, a single-key dialing number, an abbreviated dialing number, and the like. The "non-geographical division-specific parameter" is not limited to the aforementioned parameters.

If no geographical division-specific parameter has been stored in the rewritable non-volatile memory and a geographical division is selected, the control device reads at least one geographical division-specific parameter and at least one non-geographical division-specific parameter regarding the selected geographical division, and stores the parameters into the rewritable non-volatile memory.

Since geographical division-specific parameters are stored into the rewritable non-volatile memory, it becomes possible to use the communication terminal apparatus in different countries having different communication standards, specifications and the like. Since non-geographical division-specific parameters are also stored into the rewritable non-volatile memory, it becomes possible to set, for example, parameters convenient for use by each user.

In the communication terminal apparatus, the parameters regarding the geographical divisions may include geographical division-specific parameters and non-geographical division-specifics other than the geographical division-specific parameters. If at least one geographical division-specific parameter regarding a first geographical

division has already been stored in the rewritable non-volatile memory and a second geographical division is selected, the control device reads at least one geographical division-specific parameter regarding the selected second geographical division from the read-only non-volatile memory, and stores the at least one geographical division-specific parameter into the rewritable non-volatile memory.

Therefore, if at least one geographical division-specific parameter regarding a first geographical division has been stored in the rewritable non-volatile memory and a second geographical division is selected, the control device reads the geographical division-specific parameters regarding the selected second geographical division from the read-only non-volatile memory, and stores the geographical division-specific parameters into the rewritable non-volatile memory. In this case, the communication terminal apparatus does not rewrite the non-geographical division-specific parameters.

This manner of storing parameters is employed because this storing manner reduces the time needed to store parameters. That is, if the control device reads geographical division-specific parameters and non-geographical division-specific parameters from the read-only non-volatile memory, and stores the two types of parameters into the rewritable non-volatile memory, the quantity of parameters to be stored is large, so that a long time is needed to store all the necessary parameters into the rewritable non-volatile memory. On the other hand, if the control device stores only the geographical division-specific parameters regarding a newly selected geographical division, the quantity of parameters is small, so that the time needed to store the parameters into the rewritable non-volatile memory is reduced.

Furthermore, if stored parameters need to be changed to parameters regarding another geographical division due to, for example, a change of the importing country of the communication terminal apparatus, the non-geographical division-specific parameters stored in the rewritable non-volatile memory do not always need to be changed. Therefore, in this construction, the control unit writes only the geographical

division-specific parameters regarding the newly selected geographical division in the
aforementioned case

The communication terminal apparatus may further include an input device
that allows a user to rewrite parameters stored in the rewritable non-volatile memory, the
5 parameters including a geographical division code.

Communication terminal apparatuses are produced in compliance with the
communication standards, specifications and the like of their designated importing
countries, and correspondingly exported. However, there are cases where a user in an
area near a country border finds that adoption of the communication standards,
10 specifications and the like of the neighboring country is more suitable to maximize the
communication performance of the apparatus than adoption of the communication
standards, specifications and the like of the user's country. Furthermore, a user may
move to a foreign country. In such a case, this communication terminal apparatus
allows a user to re-write the country or area code by using the input device.

15 According to another aspect of the invention, there is provided a
communication terminal apparatus including a first specification storing device into
which a plurality of specifications are pre-stored and a selector device that selects a
specification from the first specification storing device. The communication terminal
apparatus further includes a second specification storing device that stores the
20 specification selected by the selector device, a determining device that determines
whether the specification stored in the second specification storing device is a
predetermined specification, and a control device that performs a control such that a
main program starts if the determining device determines that the specification stored in
the second specification storing device is the predetermined specification.

25 In a production line of this communication terminal apparatus, a specification
is selected from the plurality of specifications stored in the first specification storing
device, and the selected specification is stored into the second specification storing

device. If the determining device determines that the selected specification is a predetermined specification, the control device starts the main program.

Therefore, unless a predetermined specification is selected from the plurality of specifications, the main program is not started. Consequently, it becomes possible to prevent a failure to set a predetermined specification selected from the plurality of specifications. Furthermore, it becomes possible to prevent the main program from being started on the basis of a false specification setting. It also becomes possible to improve the product quality.

In the above-described communication terminal apparatus, the specifications may include at least one parameter regarding a communication in a geographical division. If the specifications include parameters regarding a plurality of geographical divisions, for example, countries, areas and the like, the communication specifications of various countries can be pre-stored into the first specification storing device. Therefore, in a production line of the communication terminal apparatus, the communication specification of the designated importing country can be selected and stored into the second specification storing device. If the determining device determines that the selected communication specification is a predetermined specification, the control device starts the main program.

Therefore, unless a predetermined communication specification is selected from the plurality of communication specifications, the main program is not started. Consequently, it becomes possible to prevent a failure to set a predetermined communication specification selected from the plurality of communication specifications. Furthermore, it becomes possible to prevent the main program from being started on the basis of a false specification setting. It also becomes possible to improve the product quality.

In the communication terminal apparatus, the main program may operate on the basis of the specification stored in the second specification storing device.

Therefore, since the main program operates on the basis of the predetermined specification stored in the second specification storing device, it becomes possible to reliably prevent the main program from operating on the basis of a false specification. Furthermore, since the main program is not allowed to operate unless the predetermined specification is stored in the second specification storing device, it becomes possible to reliably prevent a failure to select the predetermined specification.

The communication terminal apparatus may further include an output device that outputs a parameter of the specification stored in the second specification storing device. Therefore, since the output device, such as a liquid crystal display or the like, is provided for outputting a parameter of the specification stored in the second specification storing device, it becomes possible for an operating person to know the parameters regarding, for example, a communication specification, stored in the second specification storing device, via the output device, when selecting a predetermined specification from the first specification storing device. As a result, it becomes possible to reliably prevent a failure to select the predetermined specification.

In the communication terminal apparatus, the first specification storing device may include a read-only non-volatile memory, and the second specification storing device may include a re-writable non-volatile memory. Therefore, the plurality of specifications may be pre-stored in the read-only non-volatile memory, included in the first specification storing device. A predetermined specification selected in a production line may be stored into the read-only non-volatile memory, included in the second specification storing device.

As a result, if a false specification, not a predetermined specification, is selected and stored into the second specification storing device in a production line, the second specification storing device can be initialized, so that the predetermined specification can be selected from the first specification storing device, and can be stored into the second specification storing device. Consequently, the quality of the

communication terminal apparatus can be improved.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will be described in detail with reference to the following figures wherein:

5 Fig. 1 is an external perspective view of a facsimile apparatus according to an embodiment of the invention;

 Fig. 2 is a plan view of an operating panel unit provided in the facsimile apparatus shown in Fig. 1;

 Fig. 3 is an exemplary block diagram of a control system of the facsimile
10 apparatus;

 Fig. 4 shows an exemplary table stored in a memory of the facsimile apparatus;

 Fig. 5 is a flowchart outlining an exemplary procedure of a control operation performed during a part of the period of a maintenance mode of the facsimile apparatus;

15 Fig. 6 is a flowchart outlining a portion of the exemplary procedure of the control operation illustrated in Fig. 5;

 Fig. 7 is a flowchart outlining another portion of the exemplary procedure of the control operation illustrated in Fig. 5;

 Fig. 8 is an external perspective view of a facsimile apparatus according to a
20 second embodiment of the invention;

 Fig. 9 is a plan view of an operating panel unit of the facsimile apparatus shown in Fig. 8;

 Fig. 10 is an exemplary block diagram of a control system of the facsimile apparatus;

25 Fig. 11 shows an exemplary data table regarding the dial and busy tones of a plurality of countries stored in a memory provided in the facsimile apparatus; and

 Fig. 12 is a flowchart outlining an exemplary control operation performed for

selecting the specification of a designated importing country in a production line of the facsimile apparatus.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Preferred embodiments of the present invention in which the communication terminal apparatus of the invention is embodied in a facsimile apparatus will be described in detail hereinafter with reference to the accompanying drawings. However, the communication terminal apparatus is not limited to a facsimile apparatus but may be any type of communication apparatus capable of sending and/or receiving communication signals. For example, the communication terminal apparatus may be a wired or wireless telephone, video phone, computer assisted or intelligent television, personal digital assistant, computer, or the like.

The overall construction of a facsimile apparatus according to a first embodiment will be described with reference to Fig. 1, which is a perspective view of the facsimile apparatus.

Referring to Fig. 1, a facsimile apparatus 1 has an apparatus body 2. Connected to a right-side face of the apparatus body 2 are a power supply cord 3 and an antenna 4 for communication with a child apparatus (not shown). Provided in an upper face of the apparatus body 2 is an operating panel unit 5 including a display 6, for example, a liquid crystal display device or the like. A microphone M for inputting a voice message for an automatic answering function is disposed in a portion of the operating panel unit 5, the portion being near the antenna 4. A speaker S for outputting voices and sounds is disposed in a side face of the apparatus body 2.

Disposed in a rear portion of the apparatus body 2 is a document stacker 7 for setting a document or a stack of documents to be scanned. A sheet support 8 is disposed rearward of the document stacker 7. Disposed in a left-side portion of the apparatus body 2 is a handset base portion 9 on which a handset 10 is placed.

A start key P for starting facsimile transmission is disposed in a right-side

lower portion of the operating panel unit 5. Various other keys needed to operate the facsimile apparatus 1 are arranged in the operating panel unit 5.

The functions of various keys arranged in the operating panel unit 5 will be described with reference to Fig. 2. Fig. 2 is a plan view of the operating panel unit 5 provided in the apparatus body 2. Dial keys 11 for inputting a telephone number or the like are arranged in a left-side portion of the operating panel unit 5. The dial keys 11 include numerical keys "1" through "0", an asterisk key 12, and a pound key 13. A speaker phone key 14 is disposed to the left of a lower portion of the pad of the dial keys 11.

The particular configuration of elements in Figs. 1 and 2 is only exemplary and not meant to be limiting in any way. The elements of Figs. 1 and 2 may be arranged in any manner readily apparent to one of ordinary skill in the art without departing from the spirit and scope of the present invention.

A control system of the facsimile apparatus 1 will be described with reference to Fig. 3. Fig. 3 is a block diagram of the control system of the facsimile apparatus 1. As shown in Fig. 3, the control system of the facsimile apparatus 1 has a control unit 17 (control device) that includes a CPU as a core component. The control unit 17 is connected to a ROM 16, that is, a read-only non-volatile memory, and to an EEPROM 18, that is, a rewritable non-volatile memory, and to a RAM 19 for storing various pieces of information. The ROM 16 stores basic operation control programs for controlling a reading (or scanning) operation, a transmitting operation, a receiving operation, a recording operation and the like of the facsimile apparatus 1, and also stores parameters and the like regarding a plurality of countries that correspond to the communication standards and the like of the countries.

The ROM 16 further stores a program for selecting the parameters regarding a specified country or area or the like (geographical division) from the parameters and the like regarding the plurality of countries, areas or the like (geographical divisions) stored

in the ROM 16, and a program for initializing the EEPROM 18 on the basis of the parameters read corresponding to the selected country, area or the like. More specifically, the ROM 16 stores programs illustrated by the flowcharts in Fig. 5 through 7. As a result, the CPU operates based on the programs stored in the ROM 16.

5 The EEPROM 18 has a storage area 18a. When the parameters and the like regarding a country, area or the like are selected and read from the ROM 16 storing the parameters and the like regarding the plurality of countries, areas and the like, the parameters corresponding to the communication standards and the like of the selected country, area or the like are set in the storage area 18a. Such parameters can be set in the
10 storage area 18a by, for example, using a table TA as shown in Fig. 4.

 The table TA stored in the EEPROM 18 stores, for example, parameters with respect to a country or area code (hereinafter, simply referred to as "country code") T1, a user facsimile number T2, a user telephone number T3, a single-key dialing number T4, a user switch T5, a service person switch T6, and the like. Corresponding to the
15 parameters T1-T6, the table TA has parameter storing slots Tb into which an initially selected country code T1 and parameters in relation to that country code T1 are written, and parameters storing slots Tc into which parameters are written when a country code T1 has already been stored but the country code T1 needs to be changed.

 The purpose for storing parameters for the country code T1, the user facsimile
20 number T2, the user telephone number T3, the single-key dialing number T4, the user switch T5 and the service person switch T6 into the EEPROM 18 is to keep the parameters from being erased even if a predetermined power supply to the facsimile apparatus 1 is discontinued due to, for example, a power failure or the like, after the facsimile apparatus 1 has been set.

25 The user switch T5 includes, for example, a switch for selecting whether to add a transmission cover sheet, and the like. The service person switch T6 includes, for example, a switch for switching between a PB signal and a DP signal for transmission to

a telephone line 25, and the like.

To support the table TA stored in the EEPROM 18, the ROM 16, storing parameters regarding a plurality of countries (country A, country B, country C, ...), areas and the like, may store a plurality of parameter storing slots Tb for the plurality of countries (country A, country B, country C, ...), areas and the like. The parameters shown in Fig. 4 are merely illustrative, and parameters other than the parameters T1-T6 may also be stored.

The parameters regarding the country code T1, the user switch T5 and the service person switch T6 are geographically specific parameters, whereas the parameters regarding the user facsimile number T2, the user telephone number T3 and the single-key dialing number T4 are non-geographically specific parameters other than the geographically specific parameters. The geographically specific parameters may also include parameters other than the parameters for the country code T1, the user switch T5 and the service person switch T6. The non-geographically specific parameters other than the geographically specific parameters may also include parameters other than the parameters regarding the user facsimile number T2, the user telephone number T3 and the single-key dialing number T4.

The term "geographically specific parameters" includes parameters that need to be set specifically for each country, area or the like, for example, parameters regarding the communication standards, the communication conditions, the functions of the telephone exchanges adopted in a given country, area or the like. The values stored in the parameter storing slots Tb for the parameters T1, T5, T6 for country A, country B, country C, ... differ from one country to another. The user switch T5 and the service person switch T6 need to be set specifically for each country, area or the like.

The non-geographically specific parameters include parameters regarding data or the like that are set specifically for a user of the facsimile apparatus 1, including parameters regarding a user facsimile number, a user telephone number, a single-key

dialing number and the like. The parameters set separately for individual users mostly remain unchanged for different countries, areas and the like. It is often the case that the values stored into the parameter storing slots Tb corresponding to the parameters T2, T3, T4 are the same for country A, country B, country C and so on, and do not need to be
5 changed once they are stored. However, these parameters may be changed if necessary.

If no geographically specific parameter has been stored in the EEPROM 18, the control unit 17 performs an initializing operation of reading the geographically specific parameters and the other parameters related to a selected country, area or the like from the ROM 16, and storing them into the EEPROM 18. The initializing operation
10 makes the facsimile apparatus 1 usable in the selected country even though the communication standards, specifications and the like vary for one country to another. The initializing operation also makes it possible to set parameters suitable for use by each user.

If an inspector, for example, in an inspection line is to change the country code
15 T1 which has already been stored (e.g., country code T1 of country A), to another country code T1 (e.g., of country B), the control unit 17 reads the parameters regarding the country code T1, the user switch T5 and the service person switch T6 corresponding to country B from the ROM 16, and stores them into the parameter storing slots Tc in the EEPROM 18. However, the control unit 17 does not store the parameters regarding
20 the user facsimile number T2, the user telephone number T3 and the single-key dialing number T4, into the parameter storing slots Tc.

This manner of storing parameters is employed because, as stated above, the non-geographically specific parameters remain unchanged and therefore do not need to be rewritten if the country code T1 is changed. This storing manner reduces the time
25 needed to store parameters. That is, if the control unit 17 reads from the ROM 16 the geographically specific parameters regarding the country code T1, the user switch T5, the service person switch T6 and the like, and the other parameters regarding, for

example, the user facsimile number T2, the user telephone number T3 and the single-key dialing number T4, and stores the two types of parameters into the EEPROM 18. The quantity of parameters to be stored is large, so that a long time is needed to store all the necessary parameters into the EEPROM 18. On the other hand, if the control unit 17 stores only the newly selected geographically specific parameters (the country code T1, the user switch T5 and the service person switch T6), the quantity of parameters to be stored is small, so that the time needed to store parameters into the EEPROM 18 is reduced.

The RAM 19 is capable of temporarily storing various data calculated or processed by the CPU. The RAM 19 has a storing area 19A for storing aural information and the like, and a storing area 19B for storing image information and the like, as indicated in Fig. 3. If facsimile information is received from an external apparatus, the storing area 19B stores the received facsimile information. If facsimile information is to be transmitted from the facsimile apparatus 1 in a memory transmission mode, the storing area 19B stores the facsimile information to be transmitted. The control unit 17 is connected to an automatic answering function portion 15. If aural information is received by the automatic answering function portion 15, or if aural information is inputted via the microphone M, the aural information is converted into digital signals by the automatic answering function portion 15, and the digital aural information is stored into the storing area 19A.

The control unit 17 is connected to the operating panel unit 5 provided with the liquid crystal display (LCD) 6, a scanning unit 20 that includes a CCD unit (not shown) for reading characters, graphics and the like from a document fed from the document stacker 7 into the apparatus body 2, and a drive unit 20A for performing document conveyance control and the like while driving the CCD unit. The control unit 17 is also connected to a recording sheet cutter unit 21 for cutting a recording sheet by driving a cutter (not shown) via a cutter drive motor (not shown), a recording unit 22 that includes

a print head (not shown) for printing image information received from an external apparatus onto a recording sheet, and a drive unit 23 for performing recording sheet conveyance control and the like while driving the print head. The control unit 17 is also connected to a document sensor 28 for detecting whether a document is set at a reading position.

Furthermore, the control unit 17 is connected to the telephone line 25, that is, a communication line, via a network control unit (NCU) 24. The handset 10 is connected to the NCU 24. The control unit 17 is also connected to the speaker S for outputting aural signals. The digital information stored in the storing area 19A and the like is converted into analog aural signals by the automatic answering function portion 15. Supplied with the analog aural signals from the automatic answering function portion 15, the speaker S outputs aural signals. The control unit 17 is connected to a power source 29.

For normal facsimile transmission from the facsimile apparatus 1 constructed as described above, a user sets a document to be read in the document stacker 7, and inputs a receiver facsimile number by operating dial keys 11, and then presses the start key P. In response, the document is fed into the facsimile apparatus 1. Under control by the control unit 17, the scanning unit 20 reads image data from the document while the drive unit 20A is operating to convey the document. After compressing and modulating the image data, the control unit 17 transmits the compressed and modulated image data to the receiver apparatus via the NCU 24 and the telephone line 25.

If the facsimile apparatus 1 receives compressed and modulated image data from an external apparatus via the telephone line 25 and the NCU 24, the control unit 17 demodulates and restores the image data. Under drive control by the control unit 17, the recording unit 22 including the print head and the drive unit 23 operate to print the image data on a recording sheet provided in the apparatus body 2. After the printing operation, the control unit 17 drives the recording sheet cutter unit 21 to cut off a printed portion of

the recording sheet. The reception operation is thus completed.

For a copy operation in which the recording unit 22 records image information inputted by the scanning unit 20, the control unit 17 operates as follows. When a document to be scanned (copied) is fed into the apparatus body 2, the scanning unit 20 reads image data from the document while the drive unit 20A is operating to convey the document, under control by the control unit 17. The read image data is immediately supplied to the recording unit 22, so that the print head of the recording unit 22 and the drive unit 23 operate to print the image data onto a recording sheet provided in the apparatus body 2. After the printing operation, the control unit 17 drives the recording sheet cutter unit 21 to cut off a printed portion of the recording sheet. The copy operation is thus completed.

The procedure of a control operation performed in a maintenance mode of the facsimile apparatus 1 will be described with reference to Figs. 5 through 7. Fig. 5 is a flowchart outlining an exemplary procedure of a control operation performed during a portion of the period of the maintenance mode. Figs. 6 and 7 are flowcharts outlining portions of the control operation illustrated in Fig. 5.

After being produced, the facsimile apparatus 1 is put into an inspection line. In the maintenance mode, various aspects are inspected to see whether the facsimile apparatus 1 is normal. For example, the recording system including the recording unit 22, the scanning system including the scanning unit 20, the communication system including the NCU 24, and various other components are inspected. In an early stage of the inspection, the EEPROM 18 is initialized.

During the initialization of the EEPROM 18, the control unit 17 determines in step S1 in Fig. 5 whether a country code T1 has been inputted. At an inspection line, for example, an inspector may input a country code T1 into the facsimile apparatus 1 by operating dial keys 11 of the operating panel unit 5. Therefore, the control unit 17 checks whether a country code T1 has been inputted. For example, if the facsimile

apparatus 1 is to be exported to country A, the inspector may input the country code T1 of country A, for example, "01". If the facsimile apparatus 1 is to be exported to country B or C, the country code T1 of country B or C, for example, "00" or "09", may be input.

The control unit 17 monitors the key operation status of the dial keys 11. If the control unit 17 detects no key input, that is, determines that no country code T1 has been input (NO in step S1), the control unit 17 waits until a key input is made.

If the control unit 17 detects a key input (YES in step S1), the control unit 17 determines in step S2 whether the input is a valid country code T1. If it is not a valid country code T1 (NO in step S2), the control unit 17 returns to step S1.

For example, if the inspector mistakenly inputs "11" as a country code T1 into the facsimile apparatus 1 to be exported to country A, instead of the country code T1 "01" of country A, the control unit 17 determines in step S2 that the input is not a valid country code T1, and returns to step S1. Thus, the control unit 17 prevents the proceeding of operation based on a false country code input by the inspector.

If the key input of "01" for country A has been made (YES in step S2), the control unit 17 determines in step S3 whether there is a country code T1 stored previously. More specifically, the control unit 17 checks whether any one of the country codes T1, for example, "01", "00" or "09", has been stored in the parameter storing slot Tb for the country code T1 in the table TA.

If there is no country code T1 stored in the table TA (NO in step S3), the control unit 17 performs entire area initialization of the EEPROM 18 in step S4. Conversely, if there is a country code T1 stored previously, the control unit 17 performs initialization with respect to only the geographically specific parameters, that is, writes only the geographically specific parameters read from the ROM 16, into the EEPROM 18, in step S5.

More specifically, the control unit 17 performs the entire area initialization of the EEPROM 18 by performing an operation such as outlined in the flowchart shown in

Fig. 6, for example. In step S10, the control unit 17 reads the geographically specific parameters regarding an initially selected country, area or the like from the ROM 16, and stores the parameters into the EEPROM 18. That is, the control unit 17 reads the geographically specific parameters regarding the country code T1, the user facsimile number T2, the service person switch T6 and the like from the ROM 16, and stores them into the EEPROM 18.

Subsequently in step S11, the control unit 17 reads the non-geographically specific parameters from the ROM 16, and stores them into the EEPROM 18. That is, the control unit 17 reads the parameters regarding the user facsimile number T2, the user telephone number T3, the single-key dialing number T4 and the like from the ROM 16, and stores them into the EEPROM 18. The control unit 17 thus completes storing the parameters into the parameter storing slots Tb corresponding to the items T1 through T6 shown in Fig. 4.

Although in this embodiment, the parameters are stored into the EEPROM 18 in two steps, that is, steps S10 and S11, it is also possible to store the parameters into the EEPROM 18 in a single step.

To perform the initialization with respect to only the geographically specific parameters, the control unit 17 performs an operation such as outlined in the flowchart shown in Fig. 7, for example. In step S20, the control unit 17 reads the parameters regarding the user switch T5, the service person switch T6 and the like from predetermined areas in the ROM 16, and stores them into the EEPROM 18. The control unit 17 thus completes storing the parameters into parameter storing slots Tc corresponding to the user switch T5, the service person switch T6 and the like, as well as the country code T1, as shown in Fig. 4.

If the parameter storing slots Tb have already stored parameters but the geographically specific parameters need to be changed at an inspection line by an inspector or the like, only the parameter storing slots Tc for the country code T1, the user

switch T5, the service person switch T6 and the like are initialized, that is, parameters are written into only those parameter storing slots Tc. Therefore, the time required for the initialization with respect to the geographically specific parameters, that is, the time required for changes related to the parameter storing slots Tc, is shorter than the time
5 required for the entire area initialization of the EEPROM 18, so that the total production cost can be reduced.

If the designated importing country of the facsimile apparatus 1 is changed after the apparatus 1 has been output from the production line, it is only required that an inspector or the like make changes in relation to the parameter storing slots Tc. Thus,
10 such an importing country change can be easily and flexibly performed. In this embodiment, the initialization performed by the control unit 17 means that the control unit 17 reads a parameter from the ROM 16 and stores it into the EEPROM 18. However, a different method may also be employed according to the invention.

As is apparent from the above description, the facsimile apparatus 1 of this
15 embodiment includes a non-volatile memory device for storing various parameters, and the control unit 17 (control device) for performing operations based on the parameters and the like. The non-volatile memory device includes the ROM 16 (read-only non-volatile memory) storing parameters and the like regarding a plurality of countries, areas or the like (i.e., geographical divisions), and the EEPROM 18 (rewritable non-volatile
20 memory) capable of storing at least the aforementioned parameters and the like. When a certain country, area or the like is selected, the control unit 17 (control device) initializes the EEPROM 18 on the basis of the parameters regarding the selected country, area or the like, read from the ROM 16.

That is, when a certain country, area or the like, is selected, the control unit 17
25 reads the parameters regarding the selected country, area or the like, from the ROM 16 and then stores the read parameters into the EEPROM 18. Therefore, once a certain country, area or the like, is selected, an inspector, for example, does not need to select

various parameters related to the selected country, area or the like, so that the necessary parameters can be easily and reliably selected and stored.

It is to be understood that the invention is not restricted to the particular forms shown in the foregoing embodiment. Various modifications and alternations can be made thereto without departing from the scope of the invention. For example, the communication terminal apparatus of the invention does not need to be a facsimile apparatus, but may also be applied to home electric appliances including television sets or the like, information appliances including telephone apparatuses, computers and the like, and various other communication apparatuses including a multi-function device incorporating a facsimile transmitter-receiver function, a copier function, an automatic answering telephone function, and the like. The non-volatile memory is not limited to an EEPROM that allows rewriting in the unit of bytes, but may also be, for example, a flush-type EEPROM, or the like.

The method of selecting a certain country, area or the like is not limited to a key input method, but may also be, for example, an input method using bar codes indicating countries, areas or the like, a method in which a DTMF signal indicating a certain country, area or the like is inputted from an external device. Furthermore, the selection of certain country, area, or the like, may be performed using a pointing device, touch panel display, voice recognition, and the like.

It is preferable that a user be allowed to rewrite the parameters stored in the EEPROM 18 including the parameter regarding a country or area code. Although apparatuses are produced in accordance with the communication standards, specifications and the like of their designated importing countries, and correspondingly exported, there are cases where a user in an area near a country border finds that adoption of the communication standards, specifications and the like of the neighboring country is more suitable to maximize the communication performance of the apparatus than adoption of the communication standards, specifications and the like of the user's

country. Furthermore, a user may move to a foreign country. Therefore, it is preferable to provide an input device in the communication terminal apparatus for rewriting the content of the EEPROM 18, for example, a key or the like (not shown) dedicated for such a rewriting operation.

5 A second embodiment in which the invention is applied to a facsimile apparatus will be described with reference to Figs. 8 through 12. The overall construction of the facsimile apparatus according to the second embodiment will be described with reference to Fig. 8, which is an external perspective view of the facsimile apparatus.

10 Referring to Fig. 8, the facsimile apparatus 101 has an apparatus body 102. Connected to a right-side face of the apparatus body 102 are a power supply cord 103 and an antenna 104 for communication with a child apparatus (not shown). Provided in an upper face of the apparatus body 102 is an operating panel unit 105 in which a display 106, such as a liquid crystal display (LCD) or the like, and a microphone M are
15 disposed. The microphone M picks up user voices when the mode is switched to a speaker phone mode by using a speaker phone key 114. In the speaker phone mode, a telephone conversation via a handset 110 is switched to a telephone conversation via the microphone M and a speaker 126 (see Fig. 10) so that a user can have a telephone conversation without holding up the handset 110. Various keys are arranged in the
20 operating panel unit 105. The keys will be described in detail later.

 Disposed rear of the operating panel unit 105 is a document stacker 107 for setting a document or a stack of documents to be scanned. A sheet support 108 is disposed rearward of the document stacker 107. Disposed in a left-side portion of the apparatus body 102 is a handset base portion 109 on which the handset 110 is placed.

25 The functions of the various keys arranged in the operating panel unit 105 will be described with reference to Fig. 9. Fig. 9 is a plan view of the operating panel unit 105. Dial keys 111 for inputting a telephone number or the like are arranged in a left-

side portion of the operating panel unit 105. The dial keys 111 include numerical keys "1" through "0", an asterisk key 112, and a pound key 113. The speaker phone key 114 is disposed to the left of a lower portion of the pad of the dial keys 111. The speaker phone key 114 is provided for setting the speaker phone mode, that is, switching to a telephone conversation via the microphone M and the speaker 126. A function button 116 and the like for selecting various functions are disposed to the right of the dial keys 111 in the operating panel unit 105. Disposed in a lower right portion of the operating panel unit 105 are various keys necessary to operate the facsimile apparatus 101, including a start key P for starting facsimile transmission, and a stop button 115 for stopping facsimile transmission or the like.

The particular configuration of elements in Figs. 8 and 9 is only exemplary and not meant to be limiting in any way. The elements of Figs. 8 and 9 may be arranged in any manner readily apparent to one of ordinary skill in the art without departing from the spirit and scope of the present invention.

A control system of the facsimile apparatus 101 will be described with reference to Fig. 10. Fig. 10 is a block diagram of the control system of the facsimile apparatus 101 of the second embodiment. As shown in Fig. 10, the control system of the facsimile apparatus 101 has a control unit 117 (control device) that includes a CPU as a core component. The control unit 117 is connected to a ROM 118A, that is, a read-only non-volatile memory, and to an EEPROM 118B, that is, a rewritable non-volatile memory, and to a RAM 119. The ROM 118A stores basic operation control programs for controlling a reading (or scanning) operation, a transmitting operation, a receiving operation, a recording operation and the like of the facsimile apparatus 101, and also stores parameters and the like regarding a plurality of countries, areas and the like that correspond to the communication standards and the like of the countries. The ROM 118A further stores a program for selecting the parameters regarding a specified country or area or the like (geographical division) from the parameters and the like regarding the

plurality of countries, areas or the like (geographical divisions), and a program (illustrated in Fig. 12) for storing the parameters read corresponding to the selected country, area or the like, into the EEPROM 118B. The EEPROM 118B stores the parameters and the like regarding the selected country, area or the like, a country selection flag, and the like. The RAM 119 is provided for temporarily storing various data calculated or processed by the CPU, and aural data, image data and the like that are received via a communication link, such as a telephone line or the like.

The control unit 117 is connected to the operating panel unit 105 provided with the display 106, and to a scanning unit 120 including a reading scanner for reading characters, graphics and the like, from a document fed from the document stacker 107 into the apparatus body 102. The control unit 117 is also connected to a recording sheet cutter unit 121 for cutting a recording sheet by driving a cutter via a cutter drive motor, and to a recording unit 122 that includes a print head for printing image data received from an external apparatus via the telephone line onto a recording sheet, and to a drive unit 123 that includes a drive mechanism for driving the print head, a recording sheet conveying mechanism for performing recording sheet conveyance control, and the like.

Furthermore, the control unit 117 is connected to the telephone line 125, via a network control unit (NCU) 124. The handset 110 is also connected to the NCU 124. The control unit 117 is also connected to the speaker 126, the microphone M, and a power source 127. The speaker 126 outputs voices of a communication partner during the speaker phone mode. The speaker 126 is also used to play back voice/sound data temporarily stored in the RAM 119.

The dial keys 111 and the like, form a selector device that selects a specification, such as a parameter, from specifications corresponding to the communication standards and the like of various countries, by inputting a selection number or the like for selecting a country. The ROM 118A forms a first specification storing device that stores a plurality of specifications. The EEPROM 118B forms a

second specification storing device that stores a selected specification. The control unit 117, having the CPU as a core component, forms a determining device that determines whether the specification selected by the selector device is a predetermined specification, and a control device that performs a control to start the main program if the selected
5 specification is the predetermined specification. The display 106 forms an output device that displays a selected parameter stored in the EEPROM 118B.

For facsimile transmission from the facsimile apparatus 101 constructed as described above, a user sets a document to be read into the document stacker 107, and inputs a receiver facsimile number by operating dial keys 111, and then presses the start
10 key P. In response, the document is fed in, and image data is read from the document by the scanning unit 120. In accordance with the parameters stored in the EEPROM 118B, such as the communication standards and the like, image data is modulated and coded, and then transmitted to the receiver apparatus via the NCU 124 and the telephone line 125. If image data is received via the telephone line 125 and the NCU 124, the control
15 unit 117 demodulates and decodes the image data for re-development in accordance with the parameters stored in the EEPROM 118B, such as the communication standards and the like, and then stores the data into the RAM 119. Subsequently, the control unit 117 drives the recording unit 122 including the print head and the drive unit 123 to print the image data onto a recording sheet. After the printing operation, the control unit 117
20 drives the recording sheet cutter unit 121 to cut off a printed portion of the recording sheet.

Among the parameters of the specifications regarding a plurality of countries stored in the ROM 118A, an example of parameters regarding communication will be described with reference to Fig. 11. Fig. 11 shows a data table regarding the dial and
25 busy tones of a plurality of countries stored in the ROM 118A of the facsimile apparatus 101 of this embodiment.

The ROM 118A stores various parameters of specifications of three countries,

that is, Belgium, Italy and Sweden. Among the parameters stored in the ROM 118A, the parameters regarding the dial and busy tones employed in the communication in each country are shown in a data table 130 in Fig. 11.

As shown in Fig. 11, the data table 130 includes the items of "COUNTRY",
5 and "DETECTION", "FREQUENCY (Hz)" and "PATTERN (sec.)" for dial tones, and
"DETECTION", "FREQUENCY (Hz)" and "PATTERN (sec.)" for busy tones. With
regard to Belgium, "DETECTION", "FREQUENCY (Hz)" and "PATTERN (sec.)" for
the dial tone are defined as "YES (that is, detection is performed)", "450 Hz" and
"CONTINUOUS PATTERN", respectively, and "DETECTION", "FREQUENCY
10 (Hz)" and "PATTERN (sec.)" for the busy tone are defined as "YES", "450 Hz" and "0.5
SEC. ON-0.5 SEC. OFF PATTERN", respectively. With regard to Italy,
"DETECTION", "FREQUENCY (Hz)" and "PATTERN (sec.)" for the dial tone are
defined as "YES", "425 Hz" and "0.6 SEC. ON-1.0 SEC. OFF TO 0.2 SEC. ON-0.2
SEC. OFF PATTERN", and "DETECTION", "FREQUENCY (Hz)" and "PATTERN
15 (sec.)" for the busy tone are defined as "NO (that is, detection is not performed)", "425
Hz" and "0.2 SEC. ON-0.2 SEC. OFF PATTERN". With regard to Sweden,
"DETECTION", "FREQUENCY (Hz)" and "PATTERN (sec.)" for the dial tone are
defined as "YES", "425 Hz" and "CONTINUOUS PATTERN", and "DETECTION",
"FREQUENCY (Hz)" and "PATTERN (sec.)" for the busy tone are defined as "YES",
20 "425 Hz" and "0.25 SEC. ON-0.25 SEC. OFF PATTERN".

In this manner, the parameters regarding the dial and busy tones employed for
the communication in each of the three countries, that is, Belgium, Italy and Sweden, are
pre-stored in the ROM 118A. The parameters regarding one of the countries are
selected, and stored into the EEPROM 118B as described later.

25 The procedure of a control operation performed in a production line for
selecting the parameters of the specification regarding one of the three countries from the
parameters regarding the three countries pre-stored in the ROM 118A of the facsimile

apparatus 101, and storing the selected parameters into the EEPROM 118B, and then starting the main program, will be described with reference to Fig. 12. Fig. 12 is a flowchart outlining an exemplary control operation of selecting the specification of an importing country of the facsimile apparatus 101 in a production line thereof, according to this embodiment.

In step S1 in Fig. 12, the facsimile apparatus 101 assembled in an assembly line of the production line is powered on in an adjustment line of the production line in order to perform various adjustments. When powered on, the facsimile apparatus 101 (the control unit 117) first reads a country selection flag from the EEPROM 118B, and resets the flag, and then re-stores it into the EEPROM 118B, in accordance with a starting program stored in the EEPROM 118B.

Subsequently in step S2, it is determined whether the country selection flag has been set in the EEPROM 118B. If the country selection flag has not been set (NO in step S2), that is, if the specification of a designated importing country has not been selected nor stored into the EEPROM 118B, the operation proceeds to step S3. In step S3, a country selecting program for selecting the specification of the importing country and storing it into the EEPROM 118B is read from the ROM 118A, so that the country selecting operation is started.

Subsequently in step S4, the control unit 117 causes the display 106 to sequentially display the country names pre-stored in the ROM 118A together with their selection numbers for a predetermined time period for each country name in repeated cycles (about 1 second for each country name at a time in this embodiment). That is, the display 106 displays the country names in the order of, for example, "1: BELGIUM", "2: ITALY", "3: SWEDEN", "1: BELGIUM", ..., where the selection numbers for Belgium, Italy and Sweden are "1", "2" and "3", respectively.

Subsequently in step S5, if an operating person at the adjustment line presses a numerical key of the dial keys 111 corresponding to the selection number of the

designated importing country, the control unit 117 reads the specification of the country corresponding to the input selection number from the ROM 118A, and stores the specification into the EEPROM 118B.

Subsequently in step S6, the control unit 117 causes the display 106 to display
5 the country name corresponding to the input selection number together with the selection number for a predetermined time, such as about 10 seconds, to inquire of the operating person at the adjustment line whether the operating person needs to correct the selection. For example, if the numerical key "2" has been pressed, the display 106 displays "2: Italy ?". Therefore, in step S6, the control unit 117 can determine whether
10 country selection has been completed.

If any one of the numerical keys corresponding to the other selection numbers is pressed within the predetermined time following the start of display of the selection number and the country name inputted by the operating person, the control unit 117 determines that a new selection number has been inputted (NO in step S6). In this case,
15 the control unit 117 returns to step S5.

Conversely, if none of the numerical keys corresponding to the other selection numbers is pressed within the predetermined time following the start of display of the selection number and the country name, the control unit 117 determines that the specification corresponding to the designated importing country has been selected (YES
20 in step S6). Subsequently, the control unit 117 reads the country selection flag from the EEPROM 118B, and sets the flag, and then stores it back into the EEPROM 118B. Then, the operation returns to step S2.

If it is determined in step S2 that the country selection flag has been set in the EEPROM 118B (YES in step S2), the operation goes to step S7, in which the control
25 unit 117 reads the main program from the ROM 118A, and starts executing the main program.

Subsequently in step S8, the main program is operated on the basis of the

specification of the selected country stored in the EEPROM 118B (for example, the specification of Italy). That is, the facsimile apparatus 101 now operates on the basis of the specification of the designated importing country.

As is apparent from the foregoing description, when the facsimile apparatus 101 of this embodiment is powered on (step S1) in the adjustment line of the production line after the apparatus has been assembled in the assembly line, the control unit 117 executes the country selecting program for reading from the ROM 118A the specification of an importing country selected by an operating person, and storing the specification into the EEPROM 118B. After the specification of the designated importing country has been read from the ROM 118A and stored into the EEPROM 118B (steps S2-S6), the control unit 117 starts the main program (step S7). Then the facsimile apparatus 101 operates on the basis of the specification stored in the EEPROM 118B (step S8).

Since the program for selecting the specification of a designated importing country from the specifications of a plurality of countries stored in the ROM 118A is automatically started when the facsimile apparatus 101 assembled in the production line is powered on, the facsimile apparatus 101 reliably prevents a failure to set the specification of the designated importing country, thereby allowing an improvement in the product quality.

Furthermore, since the main program is started on the basis of the specification that has been read from the ROM 118A and stored into the EEPROM 118B, the facsimile apparatus 101 reliably prevents the main program from starting on the basis of a false specification that is incorrectly inputted. Further, since the main program cannot be started until a predetermined specification is stored into the EEPROM 118B, the facsimile apparatus 101 reliably prevents a failure to select the predetermined specification.

Since the display 106 displays the name of a country selected by an operating

person or the like in the operation of selecting a predetermined specification from the specifications stored in the ROM 118A and then storing it into the EEPROM 118B, it becomes possible to reliably prevent an error in selecting the predetermined specification.

5 If a false specification is selected and stored into the EEPROM 118B during an operation for selecting the specification of a designated importing country from the specifications stored in the ROM 118A, the EEPROM 118B can be initialized, so that it becomes possible to read the predetermined specification from the ROM 118A and store it into the EEPROM 118B. Therefore, the quality of the communication terminal
10 apparatus can be improved.

 As described above, the communication terminal apparatus of the invention prevents the main program from starting before the specification of a designated importing country is selected from the pre-stored specifications of a plurality of countries and the specification is set. Therefore, the communication terminal apparatus does not
15 operate on the basis of a false specification that is incorrectly inputted. Consequently, the invention makes it possible to prevent a failure to set a predetermined specification and an error in setting the specification, and allows an improvement in the product quality.

 The initialization and selection of geographically specific parameters and non-
20 geographically specific parameters is not limited to being performed by an inspector on an inspection line. Rather, the initialization and selection of parameters may be performed at any time during or after manufacture of the communication terminal apparatus.

 It is to be understood that the invention is not restricted to the particular forms
25 shown in the foregoing embodiments. Various modifications and alternations can be made thereto without departing from the scope of the invention.

IS WHAT IS CLAIMED:

1. A communication terminal apparatus comprising:
 - a first memory that stores parameters for each of a plurality of geographical divisions;
 - 5 a second memory; and
 - a control device that initializes the second memory on the basis of parameters for a selected geographical division, the parameters for the selected geographical division being read from the first memory.
2. The communication terminal apparatus according to claim 1, wherein the
 - 10 parameters for each of a plurality of geographical divisions include at least one of a geographical division-specific parameter and a non-geographical division-specific parameter for each of the plurality of geographical divisions.
3. The communication terminal apparatus according to claim 2, wherein if no
 - 15 geographical division-specific parameter has been stored in the second memory, the control device reads at least one of a geographical division-specific parameter regarding the selected geographical division and a non-geographical division-specific parameter regarding the selected geographical division, from the first memory, and stores the at least one of a geographical division-specific parameter and the non-geographical division-specific parameter into the second memory.
- 20 4. The communication terminal apparatus according to claim 2, wherein if at least one geographical division-specific parameter regarding a first geographical division has already been stored in the second memory and a second geographical division is selected, the control device reads at least one geographical division-specific parameter regarding the selected second geographical division from the first memory, and stores
 - 25 the at least one geographical division-specific parameter into the second memory.
5. The communication apparatus according to claim 1, further comprising an input device that allows a user to rewrite parameters stored in the second memory, the

parameters including a geographical division code.

6. The communication apparatus according to claim 1, wherein the first memory is a read-only non-volatile memory and the second memory is a rewritable non-volatile memory.

5 7. A communication terminal apparatus comprising:

a first specification storing device into which a plurality of specifications are pre-stored;

a selector device that selects a selected specification from the first specification storing device;

10 a second specification storing device that stores the specification selected by the selector device;

a determining device that determines whether the specification stored in the second specification storing device is a predetermined specification; and

15 a control device that performs a control such that a main program starts, if the determining device determines that the specification stored in the second specification storing device is the predetermined specification.

8. The communication terminal apparatus according to claim 7, wherein the specifications include at least one parameter regarding a communication in a geographical division.

20 9. The communication terminal apparatus according to claim 7, wherein the main program operates on the basis of the specification stored in the second specification storing device.

10. The communication terminal apparatus according to claim 7, further comprising an output device that outputs a parameter of the specification stored in the
25 second specification storing device.

11. The communication terminal apparatus according to claim 7, wherein the first specification storing device includes a read-only non-volatile memory, and the

second specification storing device includes a re-writable non-volatile memory.

12. A method of setting parameters in a communication apparatus, comprising:

storing parameters for each of a plurality of geographical divisions in a first memory location;

5 receiving a selection of a selected geographical division from the plurality of geographical divisions;

storing the parameters for the selected geographical division in a second memory location, the parameters for the selected geographical division being read from the first memory location.

10 13. The method of claim 12, wherein the parameters for each of a plurality of geographical divisions include at least one of a geographical division-specific parameter and a non-geographical division-specific parameter for each of the plurality of geographical divisions.

14. The method of claim 13, wherein if no geographical division-specific parameter has been stored in the second memory location, at least one of a geographical division-specific parameter regarding the selected geographical division and a non-geographical division-specific parameter regarding the selected geographical division is read from the first memory location and stored in the second memory location.

15 15. The method of claim 13, wherein if at least one geographical division-specific parameter regarding a first geographical division has already been stored in the second memory location and a second geographical division is selected, at least one geographical division-specific parameter regarding the selected second geographical division is read from the first memory location and is stored in the second memory location.

25 16. The method of claim 12, further comprising:

receiving a command to rewrite parameters stored in the second memory location, the parameters including a geographical division code.

17. A method setting parameters in a communication terminal apparatus,
comprising:

storing a plurality of specifications in a first memory location;

- 5 selecting a selected specification from the plurality of specifications in the
first memory location;
- storing the selected specification in a second memory location;
- determining whether the specification stored in the second memory location
is a predetermined specification; and
- starting a main program if the the specification stored in the second memory
10 location is the predetermined specification.

18. The method of claim 17, wherein the specifications include at least one
parameter regarding a communication in a geographical division.

19. The method of claim 17 wherein the main program operates on the basis of
the specification stored in the second memory location.

- 15 20. The method of claim 17, further comprising outputting a parameter of the
specification stored in the second memory location.

ABSTRACT OF THE DISCLOSURE

A communication terminal apparatus which includes a non-volatile memory device that stores parameters of various kinds, and a control device that performs an operation based on at least the parameters. The non-volatile memory device includes a read-only non-volatile memory, for example, a ROM, storing parameters regarding a plurality of geographical divisions, such as countries, areas and the like, and a re-writable non-volatile memory, for example, an EEPROM, capable of storing at least the parameters. When a geographical division is selected, the control device initializes the re-writable non-volatile memory on the basis of at least the parameters regarding the selected geographical division read from the read-only non-volatile memory, that is, the control device reads the parameters regarding the selected geographical division from the read-only non-volatile memory, and stores the parameters into the re-writable non-volatile memory.

Fig.1

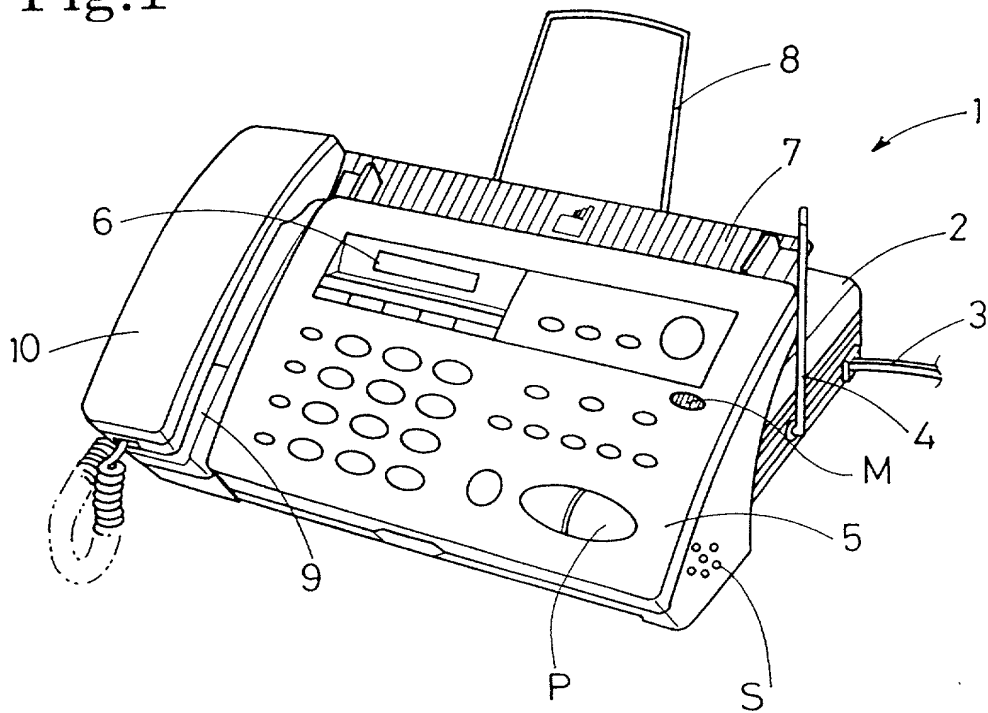


Fig.2

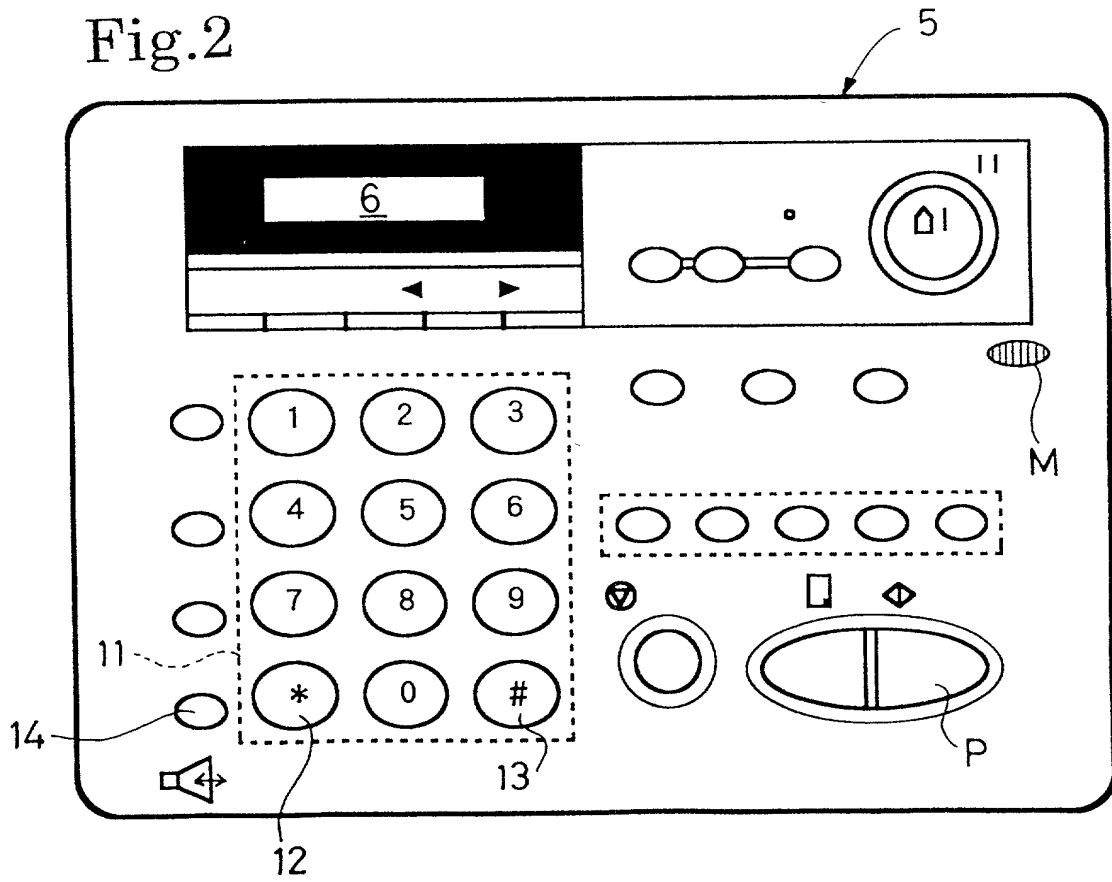


Fig.3

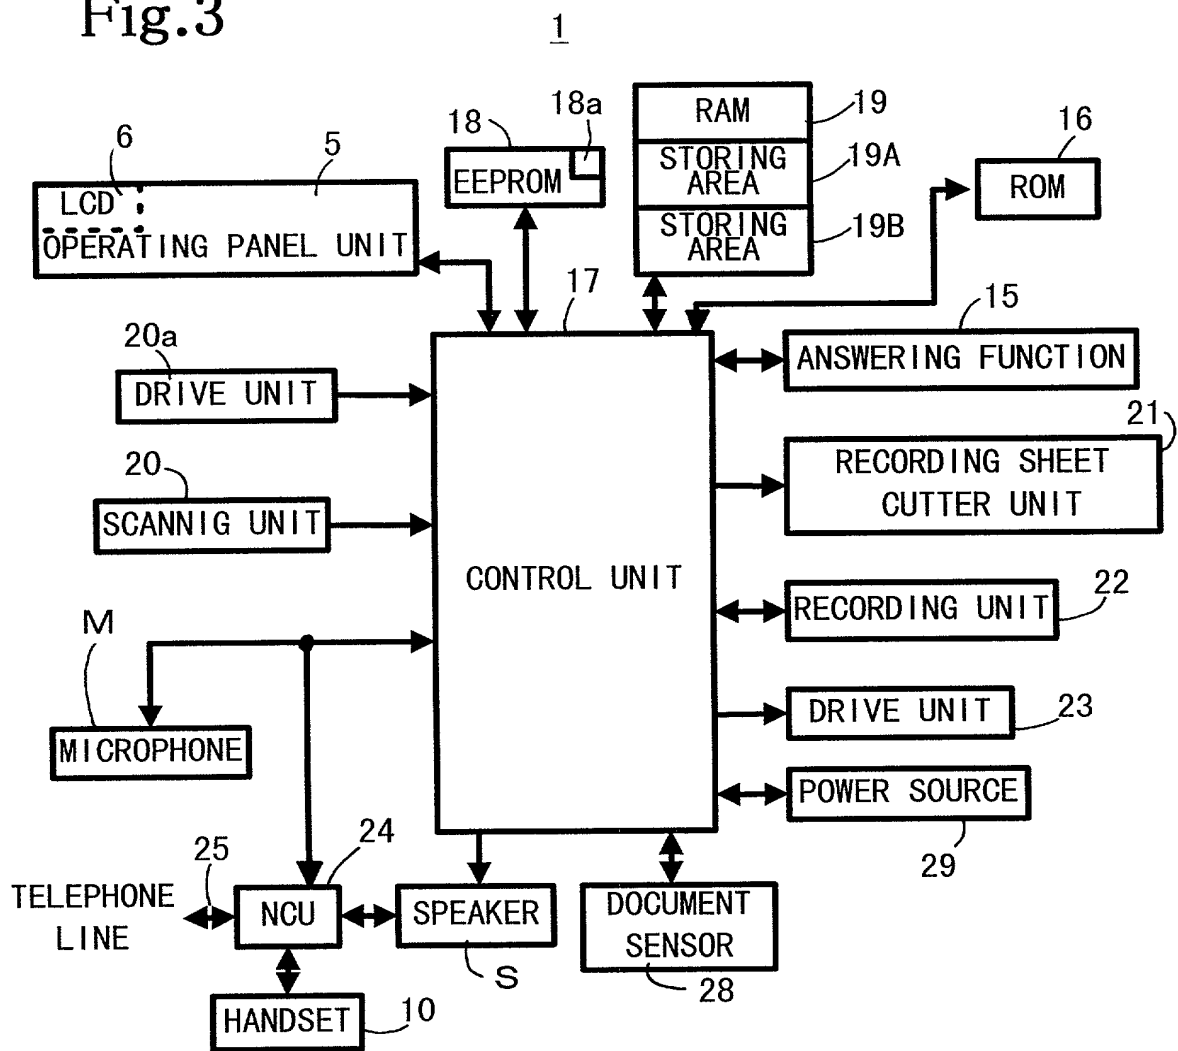


Fig. 4

IA		PARAMETERS WRITTEN WHEN COUNTRY CODE T1 IS INITIALLY STORED	PARAMETERS WRITTEN WHEN COUNTRY CODE T1 IS CHANGED
T1	COUNTRY CODE	01	00
T2	USER FAX NUMBER	000-△△△□	
T3	USER TELEPHONE NUMBER	0△0-△□□□	
T4	SINGLE-KEY DIALING NUMBER	0△△-△0□□	
T5	USER SWITCH	0△△	0△
T6	SERVICE PERSON SWITCH	0□□	0□

		Tb	Tc

Fig.5

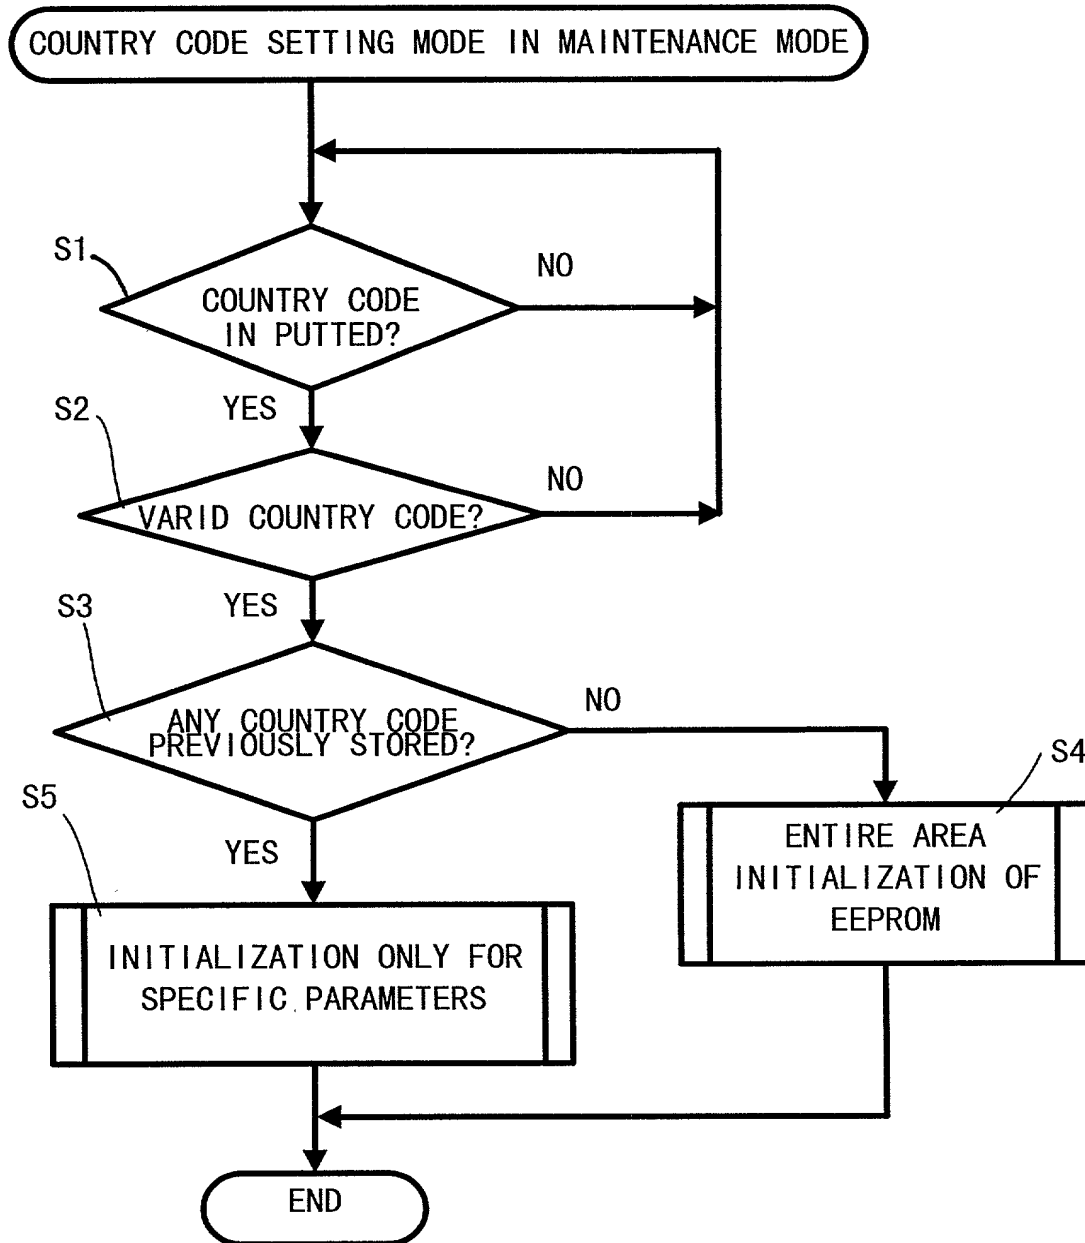


Fig.6

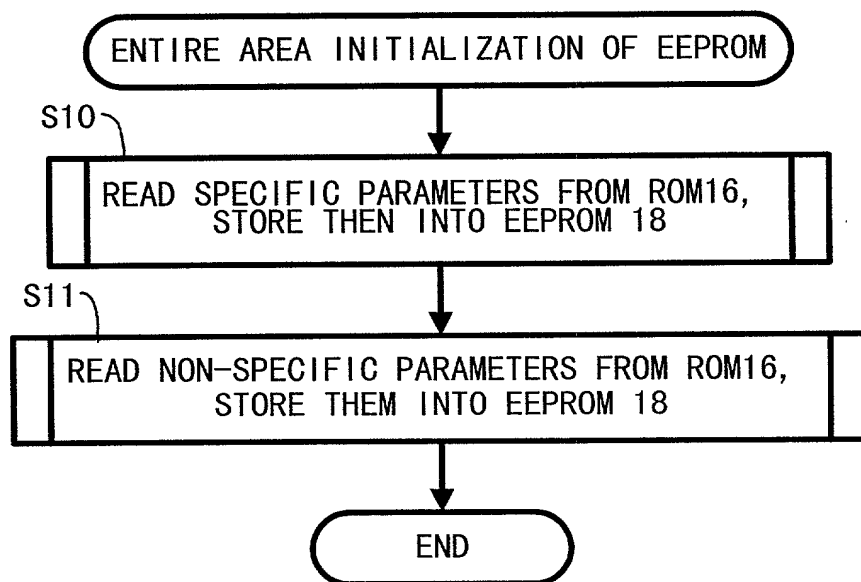


Fig.7

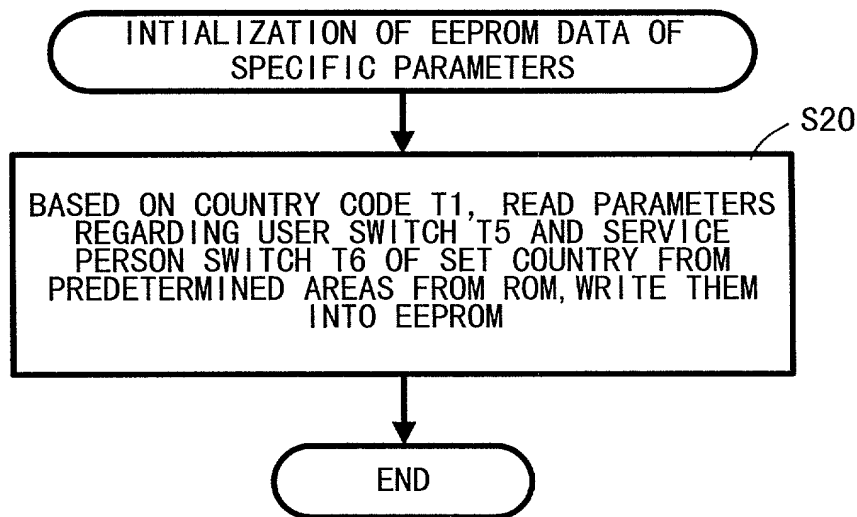


Fig.8

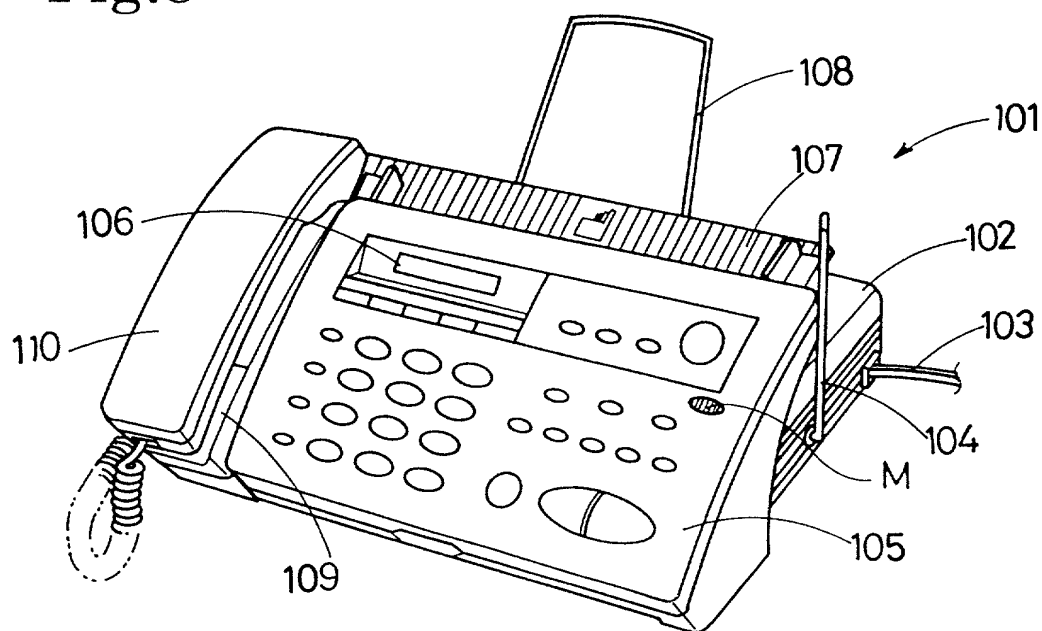


Fig.9

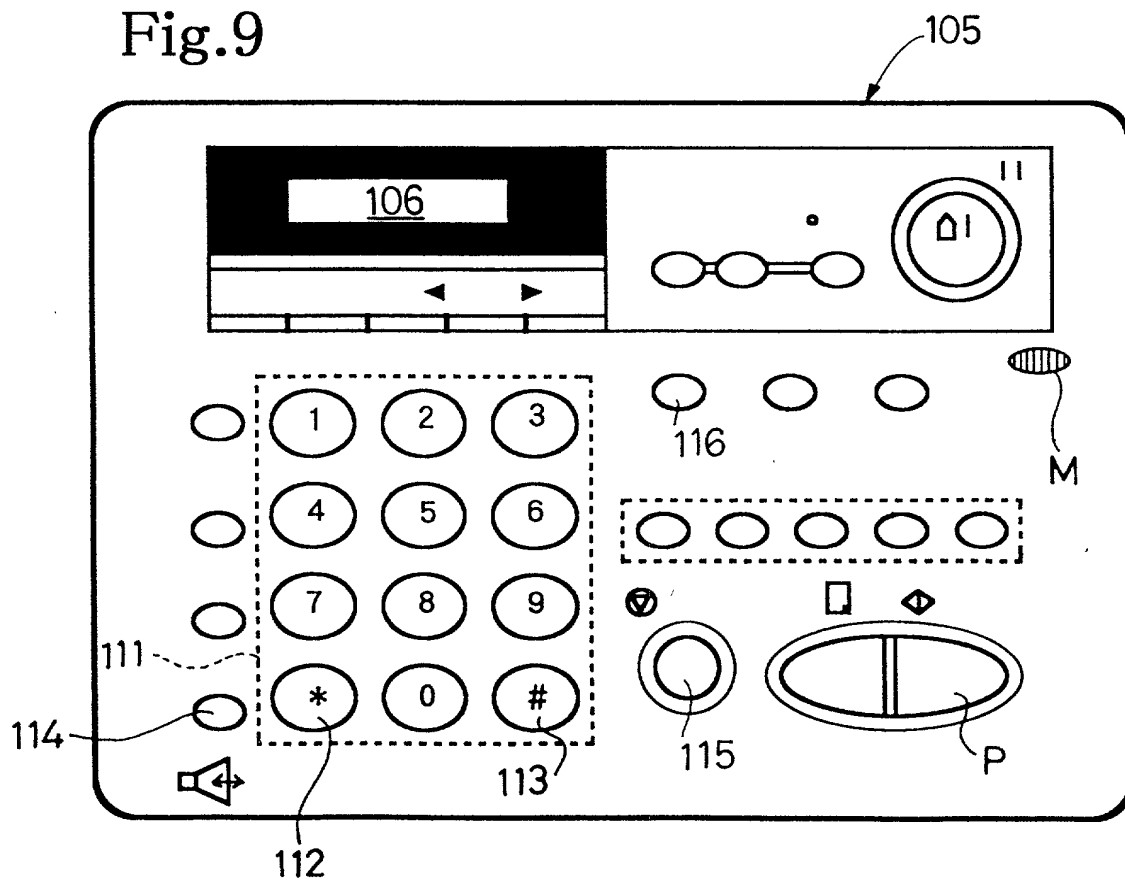


Fig.10


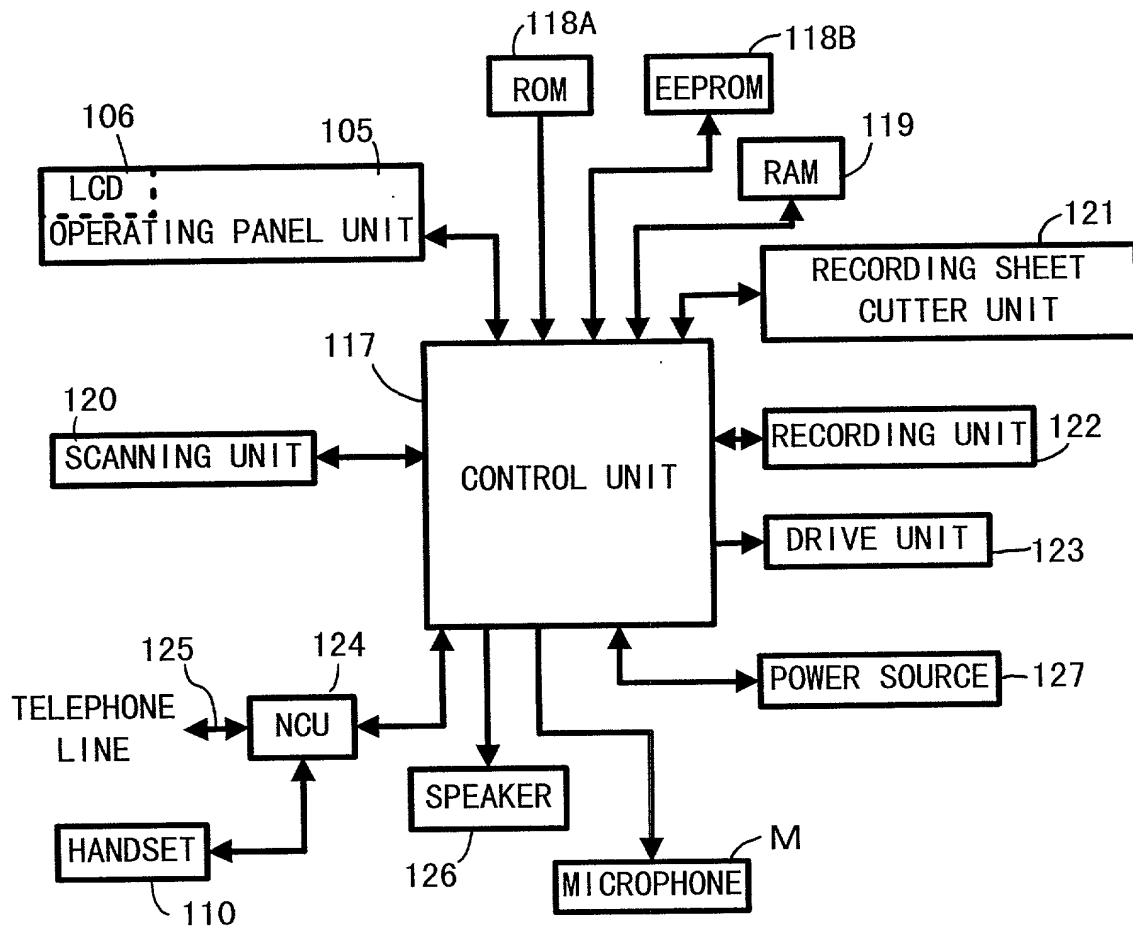


Fig.11

30

COUNTRY	DIAL TONE			BUSY TONE		
	DETECTION	FREQUENCY (Hz)	PATTERN (s)	DETECTION	FREQUENCY (Hz)	PATTERN (s)
BELGIUM	YES	450	CONTINUOUS	YES	450	ON:0.5 - OFF:0.5
ITALY	YES	425	ON:0.6 - OFF:1.0- ON:0.2 - OFF:0.2	NO	425	ON:0.2 - OFF:0.2
SWEDEN	YES	425	CONTINUOUS	YES	425	ON:0.25 - OFF:0.25

Fig.12

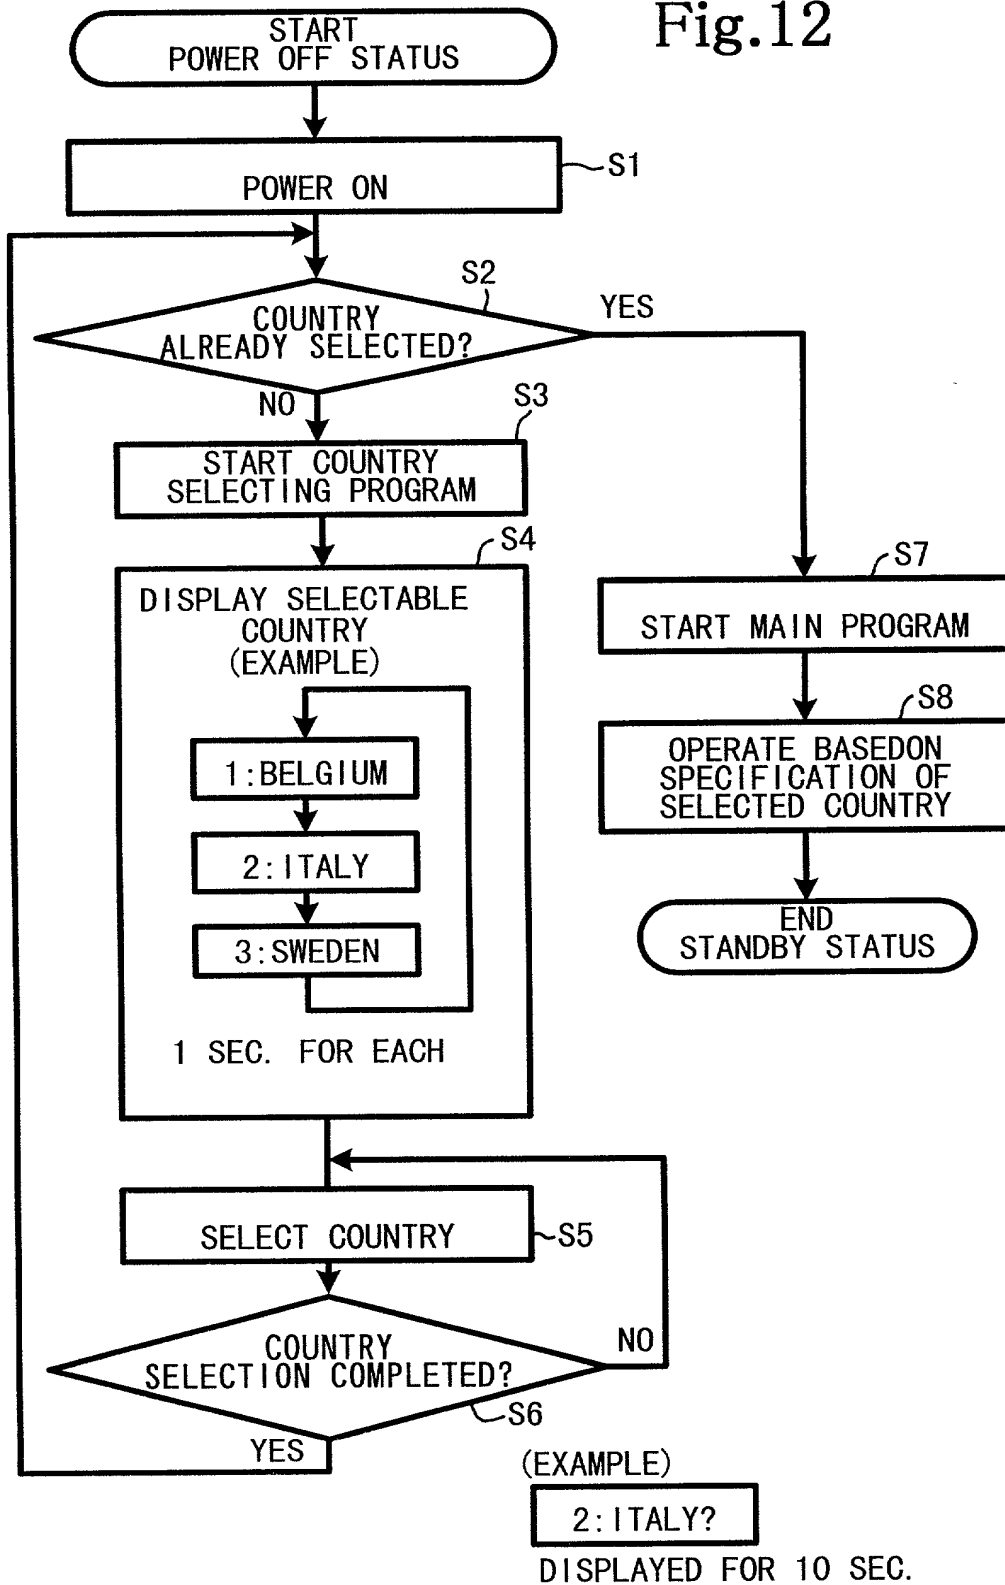

Declaration and Power of Attorney for Patent Application

特許出願宣言書兼委任状

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、
以下のとおり宣言する：

私の住所、郵便の宛先および国籍は、下欄に
氏名に続いて記載したとおりであり、下記名称の
発明に関し、請求の範囲に記載した特許を求める
主題の本来の、最初にして唯一の発明者である
(一人の氏名のみが下欄に記載されている場
合)か、もしくは本来の、最初にして共同の発明
者である(複数の氏名が下欄に記載されている場
合)と信じ、

As a below named inventor, I hereby
declare that:

My residence, post office address and
citizenship are as stated below next to my name.
I believe I am the original, first and sole inventor
(if only one name is listed below) or an original,
first and joint inventor (if plural names are listed
below) of the subject matter which is claimed
and for which a patent is sought on the invention
entitled:

COMMUNICATION TERMINAL APPARATUS AND METHOD

その明細書を
(該当するものにチェック)
☒ ここに添付する。

☐ 年 月 日

出願番号第 として出願され、

年 月 日補正し、
(該当する場合)

私は、前記のとおり補正した請求の範囲を含む
前記明細書の内容を検討し、理解したことを陳述
する。

私は、連邦規則法典第 37 章第 1 条第 56 項に従
い、本願の特許性の有無について重要な情報を開
示すべき義務を有することを認める。

私は、合衆国法典第 35 章第 119 条に基づく下記
の外国特許出願または発明者証出願の外国優先
権利益を主張し、さらに優先権の主張に係わる基
礎出願の出願日前の出願日を有する外国特許出
願または発明者証出願および/または米国仮出願
を以下に明記する：

the specification of which
(check one)
☒ is attached hereto.

☐ was filed on _____
as

Application Serial No. _____

and was amended
on _____
(if applicable)

I hereby state that I have reviewed and
understand the contents of the above identified
specification, including the claims, as amended
by any amendment referred to above.

I acknowledge the duty to disclose
information which is material to patentability as
defined in Title 37, Code of Federal Regulations,
§1.56.

I hereby claim foreign priority benefits
under Title 35, United States Code §119 of any
foreign application(s) for patent or inventor's
certificate listed below and/or any U.S.
provisional application(s) listed below and have
also identified below any foreign application for
patent or inventor's certificate having a filing
date before that of the application on which
priority is claimed:

Prior foreign and/or provisional applications
先行外国出願/仮出願:

Priority claimed
優先権の主張

Patent Appln. No. 10-66550
(Number/番号)

JAPAN
(Country/国名)

March 17, 1998
(Filing Date/出願日)

☒
(Yes/はい)

☐
(No/いいえ)

Patent Appln. No. 10-74062
(Number/番号)

JAPAN
(Country/国名)

March 23, 1998
(Filing Date/出願日)

☒
(Yes/はい)

☐
(No/いいえ)

(Number/番号)

(Country/国名)

(Filing Date/出願日)

☐
(Yes/はい)

☐
(No/いいえ)

(Number/番号)

(Country/国名)

(Filing Date/出願日)

☐
(Yes/はい)

☐
(No/いいえ)

私は、合衆国法典第 35 章第 120 条に基づく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第 35 章第 112 条第 1 項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日または PCT 国際出願日の間に公表された連邦規則法典第 37 章第 1 条第 56 項に記載の所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States code, §120 of any United States application(s) listed below and, in so far as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112.

I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No./出願番号)

(Filing Date/出願日)

(Status: Patented, Pending, abandoned/
現状: 特許成立、係属中、放棄済み)

(Application Serial No./出願番号)

(Filing Date/出願日)

(Status: Patented, Pending, abandoned/
現状: 特許成立、係属中、放棄済み)

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第 18 章第 1001 条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

委任状：私は下記発明者として、以下の代理人をここに選任し、本願の手続を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。(代理人氏名および登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771 and
Mario A. Costantino, Reg. No. 33,565

Send Correspondence To/寄附送付先:

OLIFF & BERRIDGE
P. O. BOX 19928
ALEXANDRIA, VIRGINIA 22320
USA
Telephone: (703) 836-6400

Direct Telephone Calls To (name and telephone number)/直通電話連絡先(名称および電話番号):

Full name of sole or first inventor/単独または第一発明者の氏名 Tokunori KATO	
Inventor's signature/発明者の署名 <i>Tokunori Kato</i>	Date/日付 Mar. 10, 1999
Residence/住所 Ichinomiya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1, Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken 467-8561, Japan	
Full name of second joint inventor (if any)/第二共同発明者の氏名(該当する場合) Susumu CHIDA	
Second inventor's signature/第二発明者の署名 <i>Susumu Chida</i>	Date/日付 Mar. 10, 1999
Residence/住所 Nagoya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1, Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken 467-8561, Japan	

Supply similar information and signature for third and subsequent joint inventors.
第三又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。

60699960